

Software version TC4  
FEBRUARY 2011



# The Physical Interface Guide

Cisco Telepresence System Codec C40

# What's in this guide?

The top menu bar and the entries in the Table of Contents are all hyperlinks, just click on them to go to the topic.

We recommend you visit our web site regularly for updated versions of the user documentation. Go to: <http://www.cisco.com/go/telepresence/docs> - and navigate in the right pane to find the TelePresence product documentation.

## Table of Contents

### Introduction

- About this guide ..... 4
- User documentation ..... 4
- Software download ..... 4

### Connecting to the codec

- Basic setup when connecting to Codec C40 ..... 6

### The physical interface

- The front panel ..... 8
- Rear panel sockets overview ..... 9
- Video inputs ..... 10
  - HDMI 1-2 ..... 10
  - DVI-I 3..... 10
  - Composite 3 / S-Video (YC) 3 ..... 10
  - Video input formats ..... 11
    - 2 x HDMI inputs, supported formats..... 11
    - 1 x DVI-I inputs, supported formats..... 11
    - 1 x S-Video/Composite input, supported formats..... 11
- Video outputs ..... 12
  - HDMI 1 ..... 12
  - DVI-I 2..... 12
  - Video output formats ..... 12
    - 1 x HDMI and 1 x DVI-I outputs, supported formats .. 12
- Audio inputs ..... 13
  - Microphone/Line In 1-2 (XLR) ..... 13
  - Line In 1-2 (RCA) ..... 13
- Audio HDMI in-/output..... 14
  - HDMI In 2 ..... 14
  - HDMI Out 1 ..... 14
- Audio outputs ..... 15
  - Line Out 1-2 (RCA) ..... 15
- Audio signal levels tables ..... 16
- Audio hardware information table ..... 17

- Volume control table ..... 17
- Network connectors..... 18
  - Ethernet interface ..... 18
- COM port and Camera Control port ..... 19
  - COM port..... 19
  - Camera Control port..... 19
- Power ..... 20
  - Power socket..... 20
  - Power switch ..... 20
  - Chassis grounding..... 20
- Other connectors ..... 20
  - USB..... 20

## Chapter 1

# Introduction



## About this guide

The purpose of this document is to describe the physical interface for the Codec C Series listed below.:

- Cisco TelePresence System Codec C40

## User documentation

The user documentation for the Cisco TelePresence systems, running the TC software, have several guides suitable to various user groups.

- Video conference room primer
- Video conference room acoustics guidelines
- Installation guides for the TelePresence systems
- Software release notes for the TC software
- Getting started guide for the TelePresence systems
- User guide for the TelePresence systems
  - When using the Touch controller, ref. TC4.1 version of the user guide
  - When using the Remote Control, ref. TC4.0 version of the user guide
- Quick reference guides for the TelePresence systems
- Administrator guides for the TelePresence systems
- Camera user guide for the PrecisionHD cameras
- API reference guides for the Codec C Series
- TC Console user guide for the Codec C Series
- Physical interfaces guides for the Codec C Series
- Regulatory compliance and safety information guides
- Legal & license information for products using TC software

Download the user documentation

Go to: ► <http://www.cisco.com/go/telepresence/docs>

- in the right pane, select:

- **TelePresence Peripherals** for the PrecisionHD cameras, microphones, Touch unit, and remote controls.
- **TelePresence Solutions Platform** for the Codec C Series and Quick Set C20.

## Software download

Go to: ► <http://www.cisco.com/cisco/software/navigator.html>

## Chapter 2


# Connecting to the codec



### Basic setup when connecting to Codec C40

The illustration shows you the basic setup when connecting the monitor, PC, camera, microphone, loudspeakers (if applicable), LAN and line voltage to your codec.

Inputs	Outputs	Basic Setup
		The main connectors for basic setup are highlighted in orange.

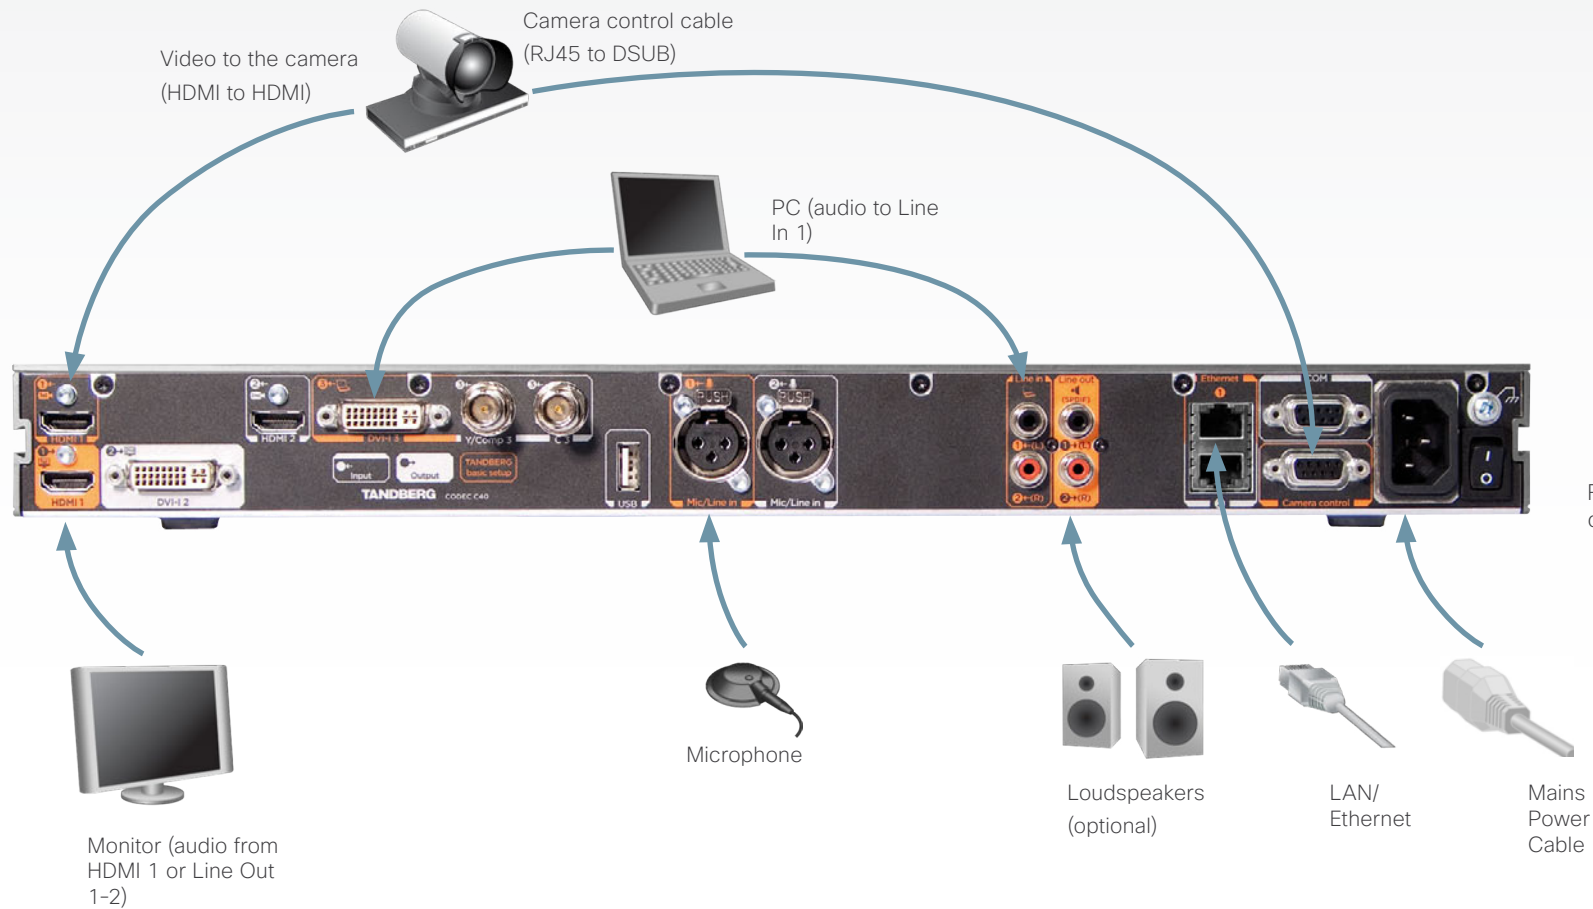

Make sure the codec has been switched off and disconnected from the line voltage whenever connecting or disconnecting other equipment.

## Chapter 3

# The physical interface



## The front panel

There are four LED's in the front of the Codec:

- **Power** - The POWER LED turns ON when power is connected, otherwise OFF
- **Call** - The CALL LED turns ON when there are active calls on the codec, otherwise OFF
- **Infrared** - The IR LED flashes when infrared signals are received
- **Alarm** - The ALARM LED turns ON when there is no connection to the network, otherwise OFF





## Rear panel sockets overview

The Codec C40 provides great flexibility for the connection of audio and video equipment. The illustration below shows the rear panel of the Codec C40.

### Video sockets

The video input sockets comprise:

- 2 x HDMI
- 1 x DVI-I
- 1 x Composite or 1 x S-Video(YC)

The video output sockets comprise:

- 1 x HDMI
- 1 x DVI-I

### Audio sockets

The audio input sockets comprise:

- 2 x XLR Female—Microphone/Line In
- 2 x RCA—Line In (1 Left, 2 Right)
- 1 x HDMI

The audio output sockets comprise:

- 2 x RCA—Left (SPDIF) and right
- 1 x HDMI

### Other sockets

The other sockets comprise:

- Ethernet 1 and Ethernet 2
- COM—Serial data port
- Camera control, serial port
- Power socket
- Grounding—Chassis grounding
- Power On/Off switch
- USB Host\*

Inputs	Outputs	Basic Setup
		The main connectors for basic setup are highlighted in orange.

\* For future use

### Codec C40 Rear Panel

The following pages give a detailed description of the rear panel sockets and connectors.



## Video inputs

### HDMI 1-2

2 x HDMI sockets, digital video input 1-2. There is audio input on HDMI 2 in.

HDMI - High Definition Multimedia Interface (digital, sound & picture)

Typical use: Camera, DVD, PC.

- Main connector. The HDMI 1 input is the main connector to the PrecisionHD 1080p camera.

### DVI-I 3

1 x DVI-I sockets, digital/analog video input 3.

- DVI-D
- DVI-A (Analog RGB / VGA)
- DVI-A Analog component/YPbPr

DVI-I is an integrated digital video interface (digital DVI-D and analog DVI-A)

Typical use: Two digital video inputs for PC presentations or used for the PrecisionHD camera.


### Composite 3 / S-Video (YC) 3

2 BNC sockets, analog video input 3.

The S-Video (YC) and the composite inputs uses the same physical connectors, and will not be able to be connected at the same time.


- S-Video 3: Connect to the Y/Comp 3 (luma) and C 3 (chroma) connectors
- Composite 3: Connect to Comp 3 connector

Typical use: Camera and DVD.

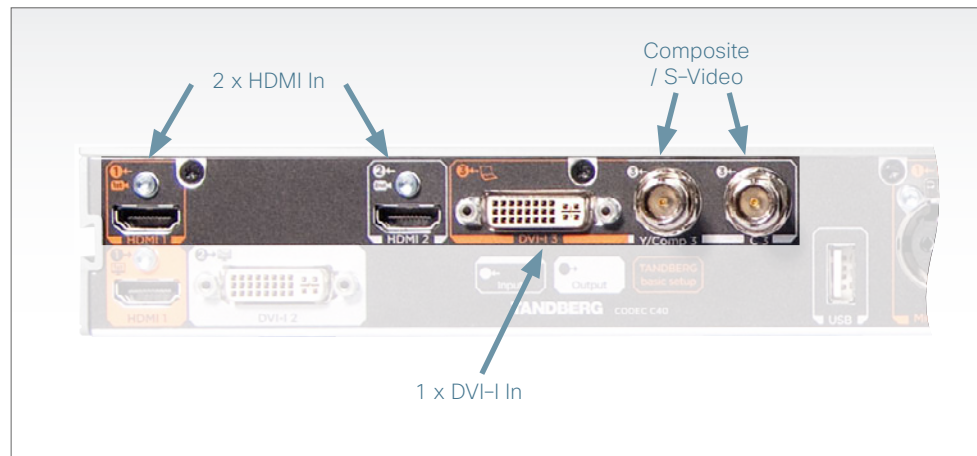


#### DVI-I pin-out

External view of socket

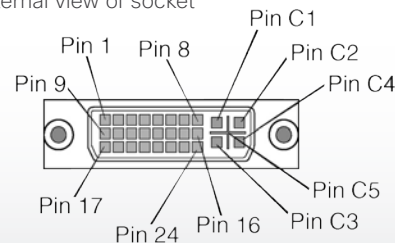

#### HDMI pin-out

External view of socket



#### HDMI Pin-out

Pin	Assignment	Pin	Assignment
1	T.M.D.S. Data 2+	11	T.M.D.S. Clock Shield
2	T.M.D.S. Data 2 Shield	12	T.M.D.S. Clock-
3	T.M.D.S. Data 2-	13	CEC
4	T.M.D.S. Data 1	14	Reserved (N.C. on device)
5	T.M.D.S. Data 1 Shield	15	SCL
6	T.M.D.S. Data 1-	16	SDA
7	T.M.D.S. Data 0	17	DDC/CEC Ground
8	T.M.D.S. Data 0 Shield	18	+5 V Power (max 50 mA)
9	T.M.D.S. Data 0-	19	Hot Plug Detect
10	T.M.D.S. Clock+		

### Levels

Composite. 1 Vpp, 75 Ω

S-Video (YC):

Y: 1 Vpp, 75 Ω

C (PAL): 0.3 Vpp, 75 Ω

C (NTSC): 0.28 Vpp, 75 Ω

## Video input formats

### 2 x HDMI inputs, supported formats

- 1920 x 1080@60, 59.94 Hz (1080p60)
- 1920 x 1080@50 Hz (1080p50)
- 1920 x 1080@30, 29.97 Hz (1080p30)
- 1920 x 1080@25 Hz (1080p25)
- 1920 x 1080@24, 23.97 Hz (1080p24)
- 1920 x 1200@50 Hz (WUXGA)
- 1680 x 1050@60 Hz (WSXGA+)
- 1600 x 1200@50, 60 Hz (UXGA)
- 1440 X 900@60 Hz (WXGA+)
- 1400 x 1050@60, 75 Hz
- 1366 x 768@60 Hz
- 1360 x 768@60 Hz
- 1280 x 1024@60, 75, 85 Hz (SXGA)
- 1280 x 960@60, 85 Hz
- 1280 x 800@60 Hz (WXGA)
- 1280 x 768@60, 75, 85 Hz (WXGA)
- 1280 x 720@60, 59.94 Hz (720p60)
- 1280 x 720@50 Hz (720p50)
- 1152 x 864@75 Hz
- 1024 x 768@60, 70, 75, 85 Hz (XGA)
- 848 x 480@60 Hz
- 800 x 600@56, 60, 72, 75, 85 Hz (SVGA)
- 720 x 576@50 Hz (576p50)
- 720 x 480@60, 59.94 Hz (480p60)
- 640 x 480@60, 72, 75, 85 Hz (VGA)

### 1 x DVI-I inputs, supported formats

Digital (DVI-D)

- Same as HDMI inputs, ref. *above*.

Analog RGB (DVI-A)

- 1920 x 1080@60 Hz (1080p60)
- 1920 x 1200@50 Hz (WUXGA)
- 1680 x 1050@60 Hz (WSXGA+)
- 1600 x 1200@60 Hz (UXGA)
- 1440 x 900@60 Hz (WXGA+)
- 1400 x 1050@60, 75 Hz
- 1366 x 768@60 Hz
- 1360 x 768@60 Hz
- 1280 x 1024@60, 75, 85 Hz (SXGA)
- 1280 x 960@60, 85 Hz
- 1280 x 800@60 Hz (WXGA)
- 1280 x 768@60, 75, 85 Hz (WXGA)
- 1280 x 720@60 Hz (720p60)
- 1152 x 864@75 Hz
- 1024 x 768@60, 70, 75, 85 Hz (XGA)
- 848 x 480@60 Hz
- 800 x 600@56, 60, 72, 75, 85 Hz (SVGA)
- 720 x 576@50 Hz
- 720 x 480@60, 59.94 Hz (480p60)
- 640 x 480@60, 72, 75, 85 Hz (VGA)

Analog YPbPr (DVI-A)

- 1920 x 1080@60 Hz (1080p60)
- 1920 x 1080@50 Hz (1080p50)
- 1920 x 1080@30 Hz (1080p30)
- 1920 x 1080@25 Hz (1080p25)
- 1280 x 720@60 Hz (720p60)
- 1280 x 720@50 Hz (720p50)
- 1280 x 720@30 Hz (720p30)
- 720 x 576@50 Hz (576p50)
- 720 x 480@60 Hz (480p60)

Extended Display Identification Data (EDID)

### 1 x S-Video/Composite input, supported formats

- PAL/NTSC

## Video outputs

### HDMI 1

1 x HDMI socket, digital video and audio output 1.  
HDMI—High Definition Multimedia Interface (digital, sound & picture).

Typical use: Monitor, recording device.

Main connector. The HDMI output 1 is the main connector to the monitor.


### DVI-I 2

1 x DVI-I socket, digital/analog video output 2.

- DVI-D.
- DVI-A (Analog RGB / VGA).

DVI-I is an integrated digital video interface (digital DVI-D and analog DVI-A).

Typical use: Monitors.

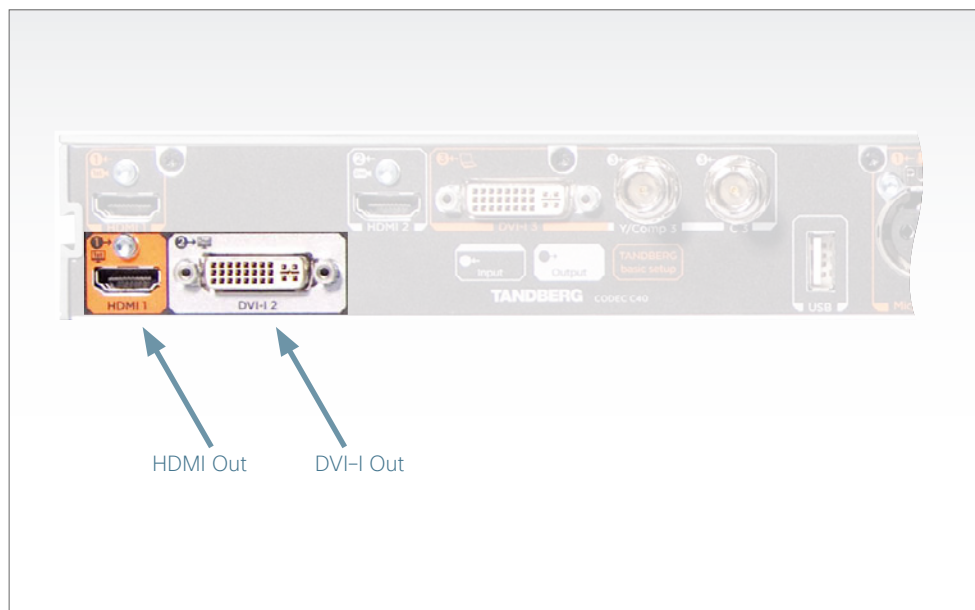

## Video output formats


### 1 x HDMI and 1 x DVI-I outputs, supported formats

- 1920 x 1080@60 Hz (1080p60)
- 1920 x 1200@60Hz (WUXGA)
- 1600 x 1200@60 Hz (UXGA)
- 1366 x 768@60 Hz
- 1360 x 768@60 Hz
- 1280 x 720@60 Hz (720p60)
- 1280 x 1024@60 Hz (SXGA)
- 1280 x 768@60 Hz (WXGA)
- 1024 x 768@60 Hz (XGA)
- 800 x 600@60 Hz (SVGA)
- 640 x 480@60 Hz (VGA)

VESA Monitor Power Management

### HDMI pin-out


External view of socket



Refer to previous pages for pin-out scheme.

### DVI-I pin-out

External view of socket

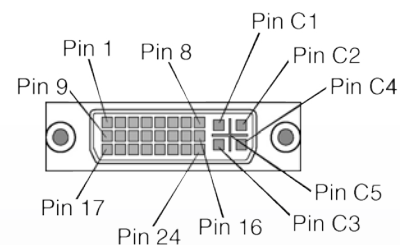

## Audio inputs

Unused, but connected audio inputs should be set to Off to avoid unwanted audio/noise.

### Microphone/Line In 1-2 (XLR)

2 x Balanced XLR sockets, audio input 1-2.

Main connector: The Microphone/Line In 1 is the main connector for the microphone.

All four microphone inputs are for balanced electret microphones, 48V phantom powered via XLR connectors.

The phantom powering of all four XLR sockets can be individually switched off. The input will then be a balanced line level input.

All Microphone/Line In 1-2 are equipped with acoustic echo canceller.

Use Microphone/Line In 1-2 to connect to an external microphone amplifier or an external mixer.

Default configuration: In default configuration, all Microphone/Line In inputs are enabled and configured as microphones.

### Line In 1-2 (RCA)

2 x RCA sockets, audio input 1-2


Audio Line In 1-2 are used when connecting to PC and to external playback devices, such as VCR's or DVD players.

Main connectors: The Line In 1 is the main connector to a PC.

Stereo. For systems with stereo I/O the audio inputs can be configured in stereo pairs:


- Connect the left channel to Line In 1
- Connect the right channel to Line In 2

Default configuration for Line In 1-2: In the default configuration Line In 1 and 2 are configured as stereo inputs for external playback devices, such as a PC.

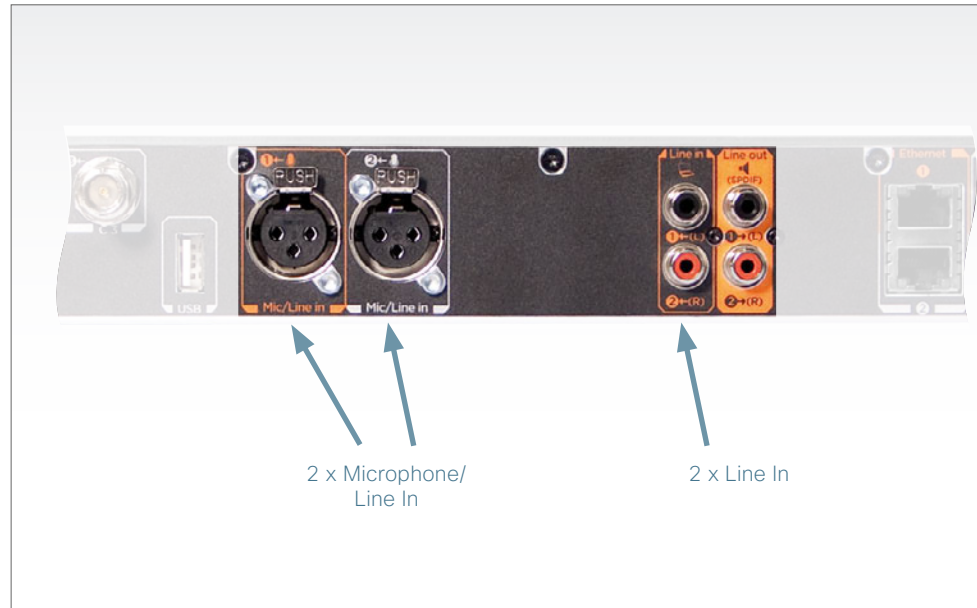

#### XLR pin-out

External view of socket



- Pin 1: Gnd
- Pin 2: Hot
- Pin 3: Cold/neutral

XLR—Electrical Connector (Cannon XL series with Rubber compound)

#### RCA pin-out

External view of socket



RCA—Phono Plug (the Radio Corporation of America)

## Audio HDMI in-/output

### HDMI In 2

1 x HDMI connector with audio input.

Typical use: Use HDMI In 2 (2-8 channels) to connect to external playback devices as DVD players. Each input support up to two channels at 48kHz sampling rate.

Unused, but connected audio inputs should be set to Off to avoid unwanted audio/noise.

### HDMI Out 1

1 x HDMI connector, audio out 1

Use HDMI Out 1 to connect to a flat screen with speakers. HDMI 1 will provide stereo audio speaker signals at 48kHz.


Main connector: The HDMI output 1 is the main connector to the monitor.

HDMI 1: Audio from far end and PC.



### HDMI pin-out

External view of socket




Please refer to previous pages for pin-out scheme.

## Audio outputs

### Line Out 1-2 (RCA)

2 x RCA sockets, audio output 1-2  
 Can be configured as two stereo pairs.  
 Main connector: Line Out 1 (left) and Line Out 2 (right) are the main connectors to the local loudspeaker system.  
 The local loudspeaker system may or may not include the DNAM (Digital Natural Audio Module).  
 Default configuration: Line Out 1-2. In default configuration, Line Out 1 and 2 are configured as stereo speakers.  
 if a DNAM is present or SPDIF\* is active on Line Out 1, then Line Out 1 provides a digital stereo speaker signal and Line Out 2 is not active.

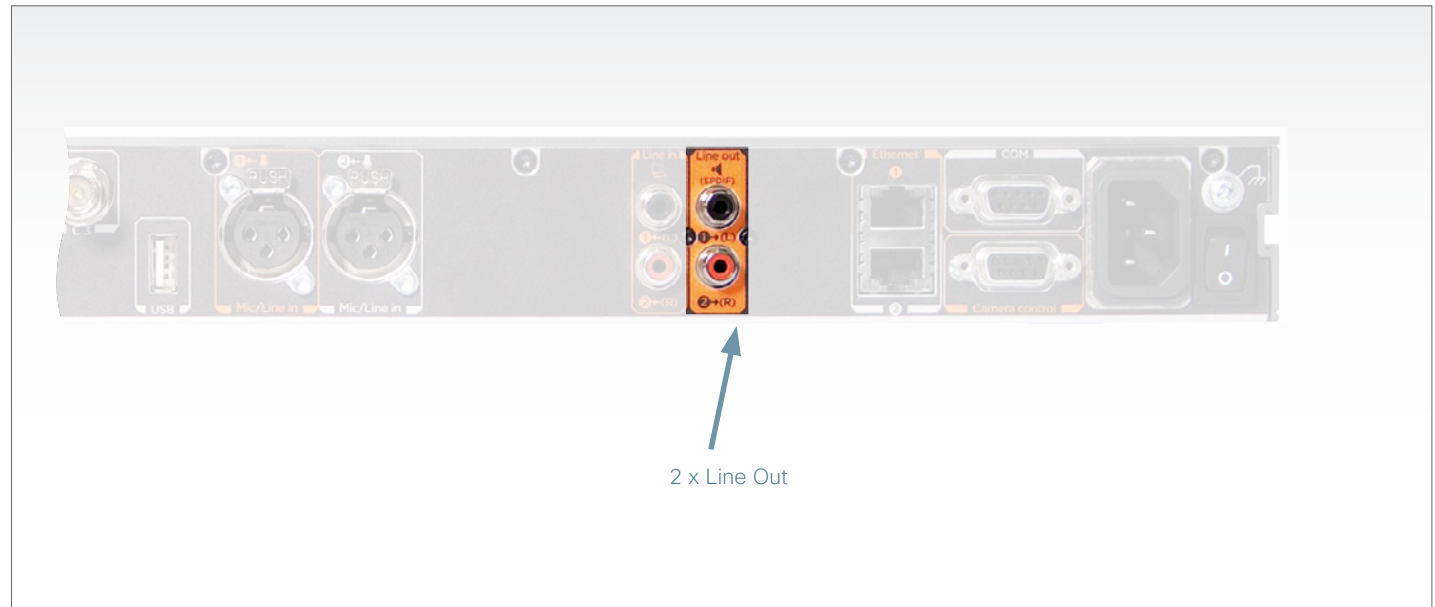

#### RCA pin-out

External view of socket



RCA—Phono Plug (the Radio Corporation of America)

#### What is a Line output

A Line output consists of all signals from the local side and all signals from the far end side.

#### What is a Speaker output

A Speaker output consists of all signals from the local side, except microphones, and all signals from the far end side.

#### Left channel

The Left channel consists of all the Left channel and Mono signals.

#### Right channel

The Right channel consists of all the Right channel and Mono signals.

\*SPDIF—Sony/Philips Digital Interface, used by the Digital Natural Audio Module.

## Audio signal levels tables

Microphone Inputs 1 to 2 XLR female			
Signal levels	Clipping level		Nominal level
	[mVpp]	[dBu]	[dBu]
0.0	275.0	-18.0	-36.0
1.0	245.1	-19.0	-37.0
2.0	218.4	-20.0	-38.0
3.0	194.7	-21.0	-39.0
4.0	173.5	-22.0	-40.0
5.0	154.6	-23.0	-41.0
6.0	137.8	-24.0	-42.0
7.0	122.8	-25.0	-43.0
8.0	109.5	-26.0	-44.0
9.0	97.6	-27.0	-45.0
10.0	87.0	-28.0	-46.0
11.0	77.5	-29.0	-47.0
12.0	69.1	-30.0	-48.0
13.0	61.6	-31.0	-49.0
<b>14.0</b>	<b>54.9</b>	<b>-32.0</b>	<b>-50.0</b>
15.0	48.9	-33.0	-51.0
16.0	43.6	-34.0	-52.0
17.0	38.8	-35.0	-53.0
18.0	34.6	-36.0	-54.0
19.0	30.9	-37.0	-55.0
20.0	27.5	-38.0	-56.0
21.0	24.5	-39.0	-57.0
22.0	21.8	-40.0	-58.0
23.0	19.5	-41.0	-59.0
24.0	17.4	-42.0	-60.0

Line Inputs 1 to 4 Female RCA/phone			
Signal levels	Clipping level		Nominal level
	[Vpp]	[dBu]	[dBu]
0.0	17.4	18.0	0.0
1.0	15.5	17.0	-1.0
2.0	13.8	16.0	-2.0
3.0	12.3	15.0	-3.0
4.0	11.0	14.0	-4.0
5.0	9.8	13.0	-5.0
6.0	8.7	12.0	-6.0
7.0	7.8	11.0	-7.0
8.0	6.9	10.0	-8.0
9.0	6.2	9.0	-9.0
<b>10.0</b>	<b>5.5</b>	<b>8.0</b>	<b>-10.0</b>
11.0	4.9	7.0	-11.0
12.0	4.4	6.0	-12.0
13.0	3.9	5.0	-13.0
14.0	3.5	4.0	-14.0
15.0	3.1	3.0	-15.0
16.0	2.8	2.0	-16.0
17.0	2.5	1.0	-17.0
18.0	2.2	0.0	-18.0
19.0	2.0	-1.0	-19.0
20.0	1.7	-2.0	-20.0
21.0	1.6	-3.0	-21.0
22.0	1.4	-4.0	-22.0
23.0	1.2	-5.0	-23.0
24.0	1.1	-6.0	-24.0

Line outputs 1 to 2 Female RCA/phone			
Signal levels	Absolute max output level		Nominal level
	[Vpp]	[dBu]	[dBu]
-24.0	1,1	-6.0	-24.0
-23.0	1,2	-5.0	-23.0
-22.0	1,4	-4.0	-22.0
-21.0	1,5	-3.0	-21.0
-20.0	1,7	-2.0	-20.0
-19.0	1,9	-1.0	-19.0
-18.0	2,2	0.0	-18.0
-17.0	2,5	1.0	-17.0
-16.0	2,8	2.0	-16.0
-15.0	3,1	3.0	-15.0
-14.0	3,5	4.0	-14.0
-13.0	3,9	5.0	-13.0
-12.0	4,4	6.0	-12.0
-11.0	4,9	7.0	-11.0
<b>-10.0</b>	<b>5,5</b>	<b>8.0</b>	<b>-10.0</b>
-9.0	6,2	9.0	-9.0
-8.0	6,9	10.0	-8.0
-7.0	7,8	11.0	-7.0
-6.0	8,7	12.0	-6.0
-5.0	9,8	13.0	-5.0
-4.0	11,0	14.0	-4.0
-3.0	12,3	15.0	-3.0
-2.0	13,8	16.0	-2.0
-1.0	15,5	17.0	-1.0
0.0	17,4	18.0	0.0

This specification is valid for Mic 1-2 inputs if Microphone Level setting is selected.

Notes:

- Default levels are marked with white text on black
- For the dBu value for input clipping level and absolute max output level, a sine waveform is assumed
- If numbers in dBV are required, dBV value is 2.2 dB lower than the dBu value.
- Example: -10 dBu equals -12.2 dBV



## Audio hardware information table

Hardware Information			
	<i>Mic 1-2 *</i>	<i>Line in 1-2</i>	<i>Line out 1-2</i>
<i>Signal type</i>	<i>Balanced</i>	<i>Unbalanced</i>	<i>Unbalanced</i>
Connector (codec)	XLR-F	Female RCA/ phono	Female RCA/ phono
Input impedance	8100 Ohm (pin 2-3)	10 k Ohm	
Output impedance			100 Ohm
Max input level when set to Min input level	-18dBu/275mVpp	18dBu/17.4Vpp	
Max input level when set to Max input level	-42dBu/35mVpp	-6dBu/2.2Vpp	
Max output level when set to Min output level			-6dBu/2.2Vpp
Max output level when set to Max output level			18dBu/17.4Vpp
Gain range	<-24dB (24 steps of 1dB) ->		
Phantom power	48 Volt +/- 2%		
Phantom power resistor pin 1	6800 Ohm		
Phantom power resistor pin 2	6800 Ohm		
Max phantom power current (per mic)	14mA		

\* This specification is valid for Mic 1-2 inputs if Microphone Level setting is selected

## Volume control table

Volume control	
<i>Ring tone volume*</i>	<i>Audio gain value</i>
0	0
1	-34.5 dB
70	0.0 dB
100	15.0 dB

\* The ring tone volume, which is displayed on screen when using the TRC5 remote control, goes from 0 to 20.


## Network connectors

### Ethernet interface


2 × Gigabit Ethernet LAN (RJ-45 Jack) interface (GbE).

Ethernet 1: Main connector for network connection

Ethernet 2: For direct pairing with the Cisco TelePresence Touch for C Series.

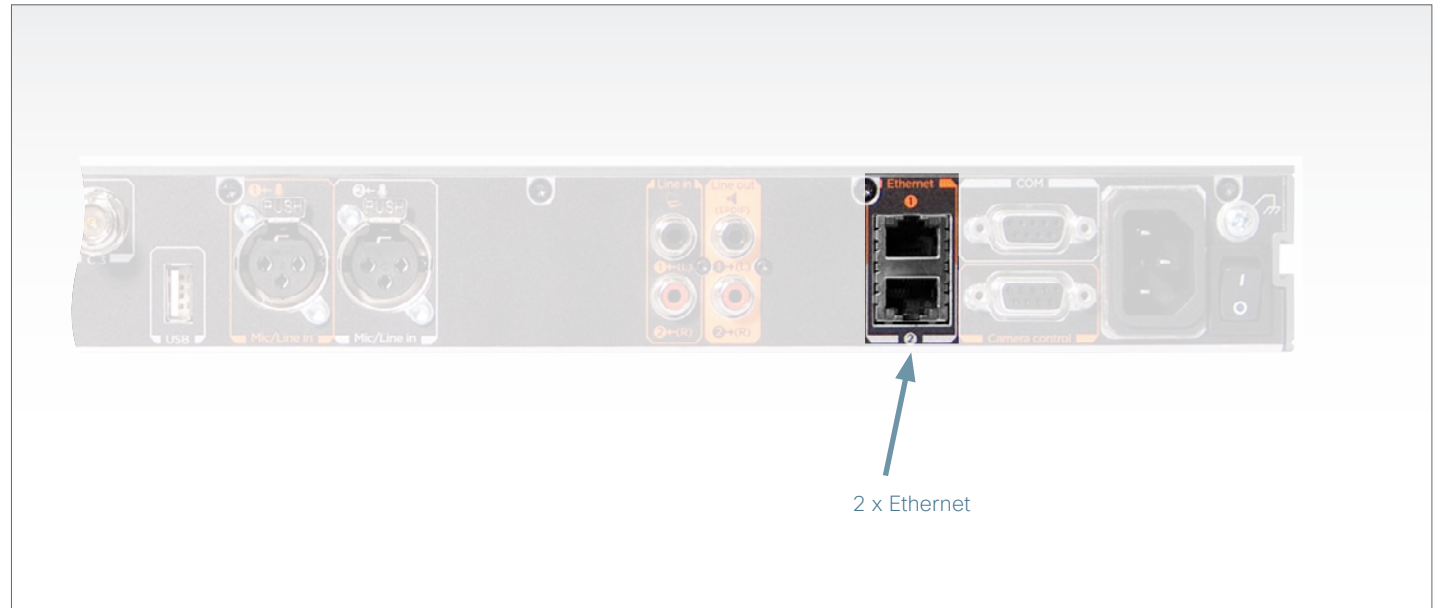

### RJ-45 Connector pin-out



Wiring diagram  
standard cable

- 1 ----- 1
- 2 ----- 2
- 3 ----- 3
- 6 ----- 6

## COM port and Camera Control port

### COM port

1 x COM (RS-232) data port for codec control and configuration through API commands.

### Camera Control port


1 x Camera Control (RS-232) port for power and camera control (pan, tilt, zoom) using the VISCA™\* protocol.

Main connector: The main camera is connected to the Camera Control port.

Power. Pin No. 4 on the Camera Control port provides 12V DC/1A to the main camera.

If more than one camera is connected, only the first camera is powered from the codec. The additional cameras must be daisy chained by using a serial cable, and each will need an external power supply.

Additional cameras. For information about additional cameras, see the PrecisionHD Camera User Guide which is found on our web site, go to: <http://www.cisco.com/go/telepresence/docs>

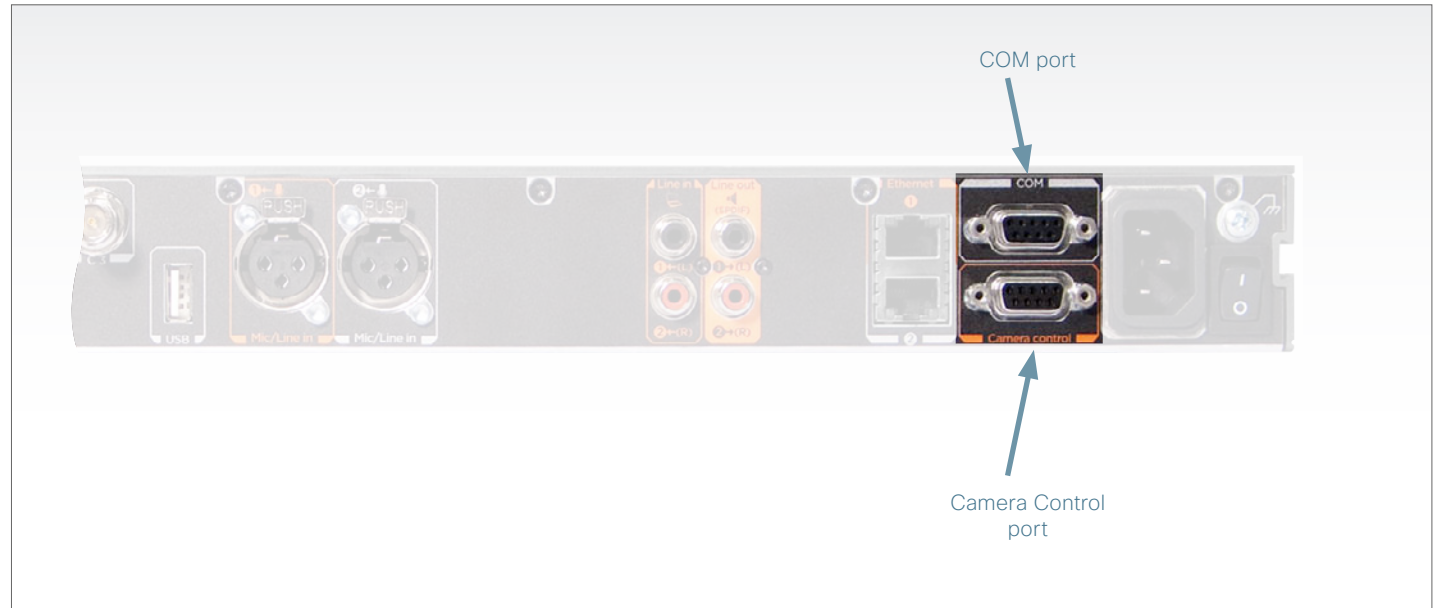

Pin-out-COM Port		
Pin	Signal name	Direction
1	Carrier detect, CD	From DCE
2	Receive data, RXD	From DCE
3	Transmit data, TXD	To DCE
4	12V/1A	To the main camera
5	Signal GND	
6	Data set ready, DSR	From DCE
7	Ready to send, RTS	To DCE
8	Clear to send, CTS	From DCE
9	Ring indicator, RI	From DCE


Pin-out-VISCA™ camera control RJ11, 8 pins shielded modular jack	
Pin	Signal name
8	+12V (presence 2.8mA current source when connected in daisy chain)
7	GND
6	TXD (out)
5	NC (no connect)
4	NC (no connect)
3	RXD (in)
2	GND
1	+12V

Pin-out-Camera cable			
Signal name	RJ-45 pin		D-SUB pin
+12V DC	1	Twisted pair	4
GND	2		5
RX	3	Twisted pair	2
TX	6		3
NC	4	Twisted pair	1
NC	5		6
GND	7	Twisted pair	5
+12V DC	8		4

\*VISCA™ is a trademark of Sony Corporation

### RS232 9 pin D-SUB pin-out

External view of socket



## Power

### Power socket

Power Cord Socket.

Accepts 100–240V, 50/60Hz, 2.8A max.

**CAUTION!** This equipment must be grounded.

### Power switch

Power Switch (On/Off)

### Chassis grounding


For grounding of the chassis

## Other connectors

### USB

1 × USB Host

For future use.

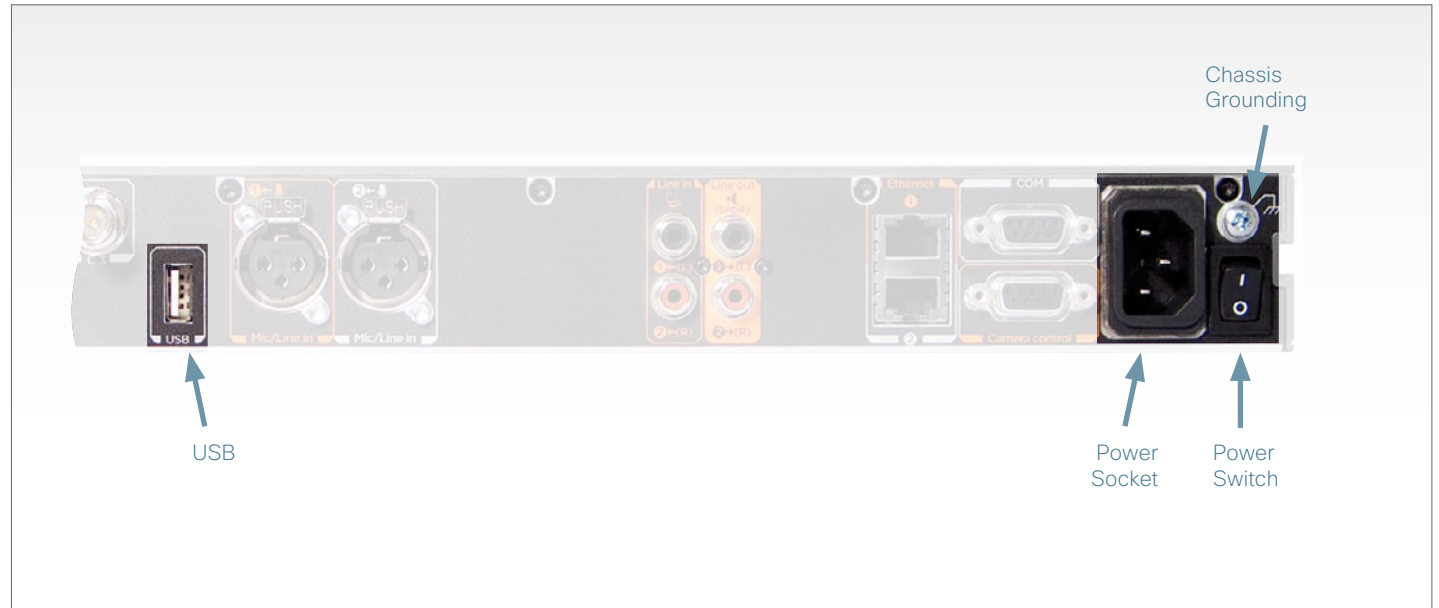



On our web site you will find an overview of the worldwide Cisco contacts.

Go to: <http://www.cisco.com/web/siteassets/contacts>

Corporate Headquarters  
Cisco Systems, Inc.  
170 West Tasman Dr.  
San Jose, CA 95134 USA

#### Disclaimer

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

TANDBERG is now a part of Cisco. TANDBERG® is a registered trademark belonging to Tandberg ASA.